

Duct/Immersion Temperature Sensor

Active sensor (4...20 mA) for measuring temperature in duct applications. In connection with a stainless steel or brass thermowell also applicable for pipe applications. NEMA 4X / IP65 rated enclosure.


Type Overview

Type	Output Signal	Probe Length	Probe Diameter
	Active Temperature		
22DT-14H	4...20 mA	50 mm	6 mm
22DT-14L	4...20 mA	100 mm	6 mm
22DT-14N	4...20 mA	150 mm	6 mm
22DT-14P	4...20 mA	200 mm	6 mm
22DT-14R	4...20 mA	300 mm	6 mm
22DT-14T	4...20 mA	450 mm	6 mm

Technical Data

Electrical data	Power Supply DC	15...24 V, $\pm 10\%$, 0.5 W		
	Cable entry	Cable gland PG11 $\varnothing 6...10$ mm, with strain relief $\varnothing 6...8$ mm		
Functional data	Multirange	8 measuring ranges selectable		
	Output signal active note	Current output: max. 500 Ω load		
	Media	Air Water		
Measuring data	Measured values	Temperature		
	Measuring range temperature	Active sensor: range selectable Attention: max. measuring temperature is restricted by max. medium temperature (see Safety data)		
	Setting	range [°C]	range [°F]	Factory setting
	S0	-50...50 °C	-30...130 °F	
	S1	-10...120 °C	0...250 °F	
	S2	0...50 °C	40...140 °F	
	S3	0...250 °C	30...480 °F	
	S4	-15...35 °C	0...100 °F	
	S5	0...100 °C	40...240 °F	
	S6	-20...80 °C	40...90 °F	
	S7	0...160 °C	0...150 °F	✓
	Accuracy temperature active	± 0.5 °C @ 21 °C [± 0.9 °F @ 70 °F]		

Materials	Cable gland	PA6, black
	Housing	Cover: Lexan, Belimo orange NCS S0580-Y6OR Bottom: Lexan, Belimo orange NCS S0580-Y6OR Seal: 0467 NBR70, black
Safety data	Ambient humidity	85% r.H., non-condensing
	Ambient temperature	-35...50 °C [-30...120 °F]
	Medium temperature	-50...160 °C [-60...320 °F]
	Housing surface temperature	Max. 70 °C [160 °F]
	Protection class IEC/EN	III Protective extra-low voltage (PELV)
	Protection class UL	UL Class 2 Supply
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-9
	Certification UL	cULus acc. to UL60730-1A/-2-9, CAN/CSA E60730-1:02/-2-9, CE acc. to 2004/108/EC and 2006/95/EC, NEMA 4X, IP65, UL Enclosure Type 4X
	Degree of protection IEC/EN	IP65
	Degree of protection NEMA/UL	NEMA 4X
	Quality Standard	ISO 9001
	Weight	0.10 lbs

Safety notes


The installation and assembly of electrical equipment should only be performed by authorized personnel.

This device has been designed for use in stationary heating, ventilation and air conditioning systems and must not be used outside the specified field of application. Unauthorised modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten human, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual


Remarks

- General remarks concerning sensors** When using lengthy connection wires (depending on the cross section used) the measuring result might be falsified due to a voltage drop at the common GND-wire (caused by the voltage current and the line resistance). In this case, 2 GND-wires must be wired to the sensor - one for supply voltage and one for the measuring current.
- Sensing devices with a transducer should always be operated in the middle of the measuring range to avoid deviations at the measuring end points. The ambient temperature of the transducer electronics should be kept constant. The transducers must be operated at a constant supply voltage (± 0.2 V). When switching the supply voltage on/off, onsite power surges must be avoided.
- Build-up of Self-Heating by Electrical Dissipative Power** Temperature sensors with electronic components always have a dissipative power which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power should be taken into account when measuring temperature. In case of a fixed operating voltage (± 0.2 V) this is normally done by adding or reducing a constant offset value. As Belimo transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0...10 V / 4...20 mA have a standard setting at an operating voltage of DC 24 V. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of a trimming potentiometer on the sensor board.

Accessories

Scope of delivery	Mounting Clip Screws Adhesive foil																														
Optional accessories air	<table border="1"> <thead> <tr> <th>Description</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>Mounting flange 6 mm, Plastic (adjustable), up to max. 120 °C</td> <td>A-22D-A03</td> </tr> <tr> <td>Mounting flange 6 mm, Brass, up to max. 260 °C</td> <td>A-22D-A05</td> </tr> </tbody> </table>	Description	Type	Mounting flange 6 mm, Plastic (adjustable), up to max. 120 °C	A-22D-A03	Mounting flange 6 mm, Brass, up to max. 260 °C	A-22D-A05																								
Description	Type																														
Mounting flange 6 mm, Plastic (adjustable), up to max. 120 °C	A-22D-A03																														
Mounting flange 6 mm, Brass, up to max. 260 °C	A-22D-A05																														
Recommended accessories water	<table border="1"> <thead> <tr> <th>Description</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>Thermowell pocket Stainless steel, 50 mm, G1/2", SW27</td> <td>A-22P-A06</td> </tr> <tr> <td>Thermowell pocket Stainless steel, 100 mm, G1/2", SW27</td> <td>A-22P-A08</td> </tr> <tr> <td>Thermowell pocket Stainless steel, 150 mm, G1/2", SW27</td> <td>A-22P-A10</td> </tr> <tr> <td>Thermowell pocket Stainless steel, 200 mm, G1/2", SW27</td> <td>A-22P-A12</td> </tr> <tr> <td>Thermowell pocket Stainless steel, 300 mm, G1/2", SW27</td> <td>A-22P-A14</td> </tr> <tr> <td>Thermowell pocket Stainless steel, 450 mm, G1/2", SW27</td> <td>A-22P-A16</td> </tr> <tr> <td>Thermowell pocket Brass, 50 mm, G1/2", SW22</td> <td>A-22P-A18</td> </tr> <tr> <td>Thermowell pocket Brass, 100 mm, G1/2", SW22</td> <td>A-22P-A20</td> </tr> <tr> <td>Thermowell pocket Brass, 150 mm, G1/2", SW22</td> <td>A-22P-A22</td> </tr> <tr> <td>Thermowell pocket Brass, 200 mm, G1/2", SW22</td> <td>A-22P-A24</td> </tr> <tr> <td>Thermowell pocket Brass, 300 mm, G1/2", SW22</td> <td>A-22P-A26</td> </tr> <tr> <td>Thermowell pocket Brass, 450 mm, G1/2", SW22</td> <td>A-22P-A28</td> </tr> <tr> <td>Syringe thermal contact fluid</td> <td>A-22P-A44</td> </tr> <tr> <td>Compression fitting with cutting ring, Stainless steel, G 1/4" (external thread) for 6 mm</td> <td>A-22P-A45</td> </tr> </tbody> </table>	Description	Type	Thermowell pocket Stainless steel, 50 mm, G1/2", SW27	A-22P-A06	Thermowell pocket Stainless steel, 100 mm, G1/2", SW27	A-22P-A08	Thermowell pocket Stainless steel, 150 mm, G1/2", SW27	A-22P-A10	Thermowell pocket Stainless steel, 200 mm, G1/2", SW27	A-22P-A12	Thermowell pocket Stainless steel, 300 mm, G1/2", SW27	A-22P-A14	Thermowell pocket Stainless steel, 450 mm, G1/2", SW27	A-22P-A16	Thermowell pocket Brass, 50 mm, G1/2", SW22	A-22P-A18	Thermowell pocket Brass, 100 mm, G1/2", SW22	A-22P-A20	Thermowell pocket Brass, 150 mm, G1/2", SW22	A-22P-A22	Thermowell pocket Brass, 200 mm, G1/2", SW22	A-22P-A24	Thermowell pocket Brass, 300 mm, G1/2", SW22	A-22P-A26	Thermowell pocket Brass, 450 mm, G1/2", SW22	A-22P-A28	Syringe thermal contact fluid	A-22P-A44	Compression fitting with cutting ring, Stainless steel, G 1/4" (external thread) for 6 mm	A-22P-A45
Description	Type																														
Thermowell pocket Stainless steel, 50 mm, G1/2", SW27	A-22P-A06																														
Thermowell pocket Stainless steel, 100 mm, G1/2", SW27	A-22P-A08																														
Thermowell pocket Stainless steel, 150 mm, G1/2", SW27	A-22P-A10																														
Thermowell pocket Stainless steel, 200 mm, G1/2", SW27	A-22P-A12																														
Thermowell pocket Stainless steel, 300 mm, G1/2", SW27	A-22P-A14																														
Thermowell pocket Stainless steel, 450 mm, G1/2", SW27	A-22P-A16																														
Thermowell pocket Brass, 50 mm, G1/2", SW22	A-22P-A18																														
Thermowell pocket Brass, 100 mm, G1/2", SW22	A-22P-A20																														
Thermowell pocket Brass, 150 mm, G1/2", SW22	A-22P-A22																														
Thermowell pocket Brass, 200 mm, G1/2", SW22	A-22P-A24																														
Thermowell pocket Brass, 300 mm, G1/2", SW22	A-22P-A26																														
Thermowell pocket Brass, 450 mm, G1/2", SW22	A-22P-A28																														
Syringe thermal contact fluid	A-22P-A44																														
Compression fitting with cutting ring, Stainless steel, G 1/4" (external thread) for 6 mm	A-22P-A45																														

Wiring diagram

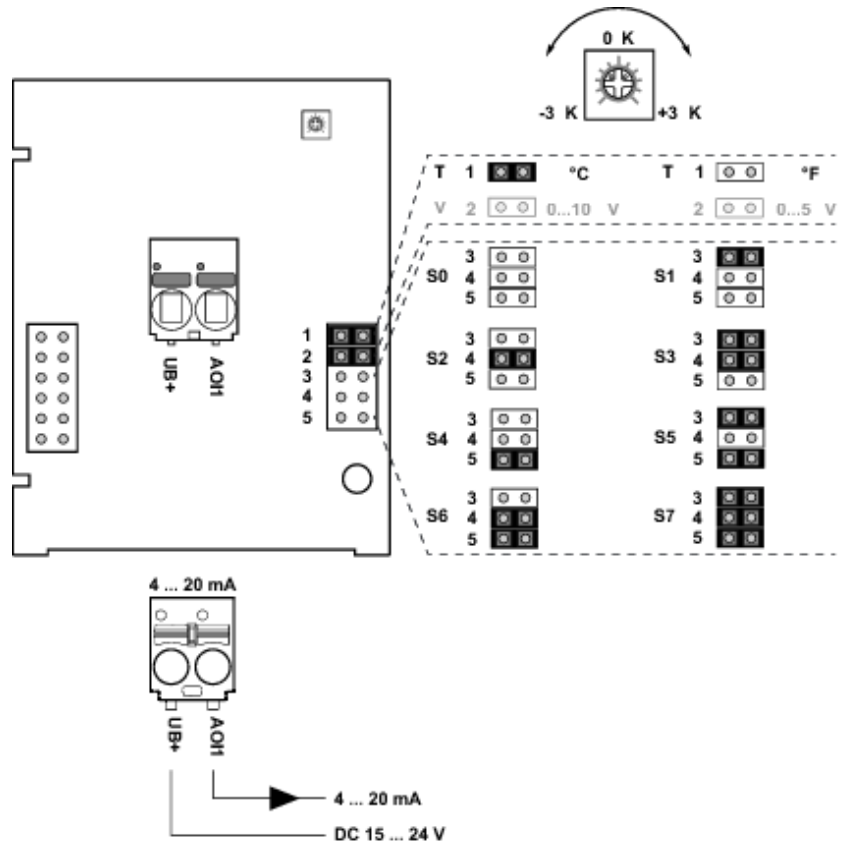

The adjustment of the measuring ranges is made by changing the bonding jumpers. The output value in the new measuring range is available after 2 seconds.

Setting	range [°C]	range [°F]	Factory setting
S0	-50...50 °C	-30...130 °F	
S1	-10...120 °C	0...250 °F	
S2	0...50 °C	40...140 °F	
S3	0...250 °C	30...480 °F	
S4	-15...35 °C	0...100 °F	
S5	0...100 °C	40...240 °F	
S6	-20...80 °C	40...90 °F	
S7	0...160 °C	0...150 °F	✓

Dimensions

